

### optibelt *DK*

These belts are used if several pulleys are located on one level and the direction of rotation of one or multiple pulleys is to be changed. The Optibelt double section V-belt is ideally suited for use in typical serpentine designs.

#### Advantages


- Flexible and low-tension design
- Excellent running characteristics
- Superb flexibility
- Low stretch characteristics
- High level of performance

No special grooved pulleys are required for the application of Optibelt DK double section V-belts. The standard grooved pulleys of the corresponding sections can be applied. They are mainly used in agricultural machines and increasingly also in general engineering.

### Examples of use

---

- |                       |  |
|-----------------------|--|
| Agricultural machines | ■ Harvesters   |
|                       | ■ Mowing machines                                    |
| Engineering           | ■ Special drives with change of rotational direction |
| Textile machines      | ■ Looms  |
| Cleaning machines     | ■ Road sweepers                                      |
| Gardening equipment   | ■ Mowers   |

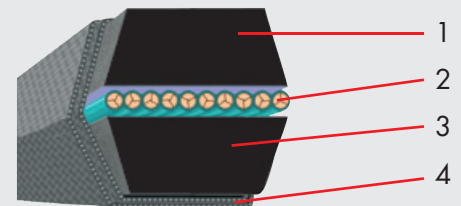

- 1 Rubber core
- 2 Rope cord
- 3 Rubber core
- 4 Cover fabric

#### Sections:

AA/HAA; BB/HBB; CC/HCC;  
DD/HDD; 22 x 22; 25 x 22

#### Dimensions:

1980 to 6000 mm  
standard range  
Further dimensions on request

#### V-grooved pulleys:

All standard pulleys  
Special pulleys on request